

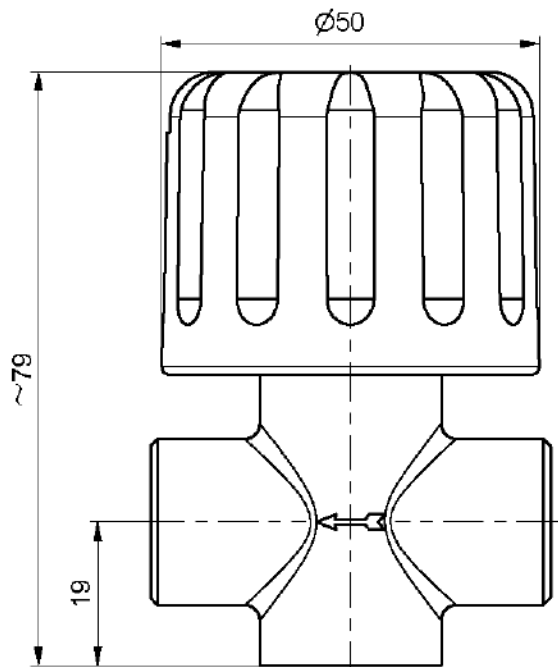




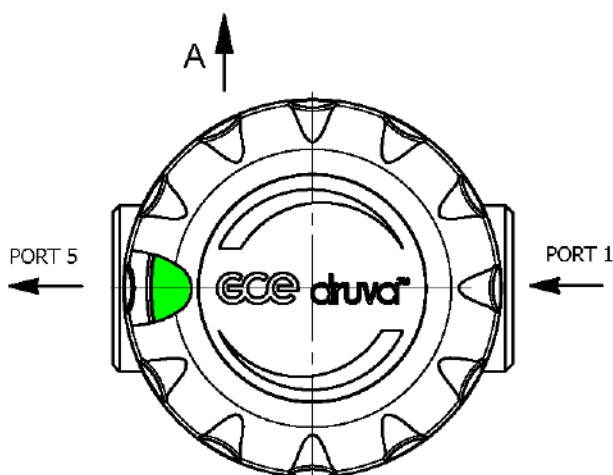

2x M6
6,5MM DEEP

BOTTOM VIEW
A (1:1)

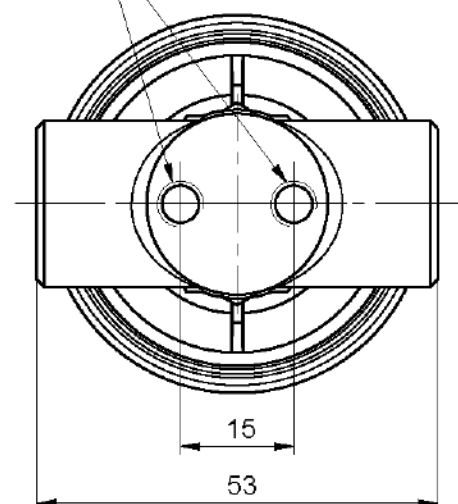

ORDERING INFORMATION

VPL XX X XX XX XXXX 0000 XXXX 0000

TYPE:
DS - DIAPHRAGM SHUT OFF

ACTION:
M - MANUAL ACTION

PORTING CODE:
AR - 2PORT (1 In/ 5 Out)

WORKING PRESSURE:
F1 - 130 BAR. (BRASS FITTINGS ONLY)
GX - 300 BAR. (STAINLESS STEEL FITTINGS ONLY)
BASIC VALVE RATED FOR 300 BAR

PORT 2
0000 - WITHOUT

PORT 5
SEE THE LIST OF CONNECTIONS

PORT 3
0000 - WITHOUT

PORT 1
SEE THE LIST OF CONNECTIONS

LIST OF CONNECTIONS

N14F - NPT1/4" FEMALE
0000 - WITHOUT (PORT 3 AND PORT 7)

M03B - COMPRESSION FITTING Ø 3MM BRASS
M06B - COMPRESSION FITTING Ø 6MM BRASS
M08B - COMPRESSION FITTING Ø 8MM BRASS
M10B - COMPRESSION FITTING Ø 10MM BRASS
M12B - COMPRESSION FITTING Ø 12MM BRASS
M03S - COMPRESSION FITTING Ø 3MM SS
M06S - COMPRESSION FITTING Ø 6MM SS
M08S - COMPRESSION FITTING Ø 8MM SS
M10S - COMPRESSION FITTING Ø 10MM SS
M12S - COMPRESSION FITTING Ø 12MM SS
IX2B - COMPRESSION FITTING Ø1/8" BRASS
IX4B - COMPRESSION FITTING Ø1/4" BRASS
IX6B - COMPRESSION FITTING Ø3/8" BRASS
IX8B - COMPRESSION FITTING Ø1/2" BRASS
IX2S - COMPRESSION FITTING Ø1/8" SS
IX4S - COMPRESSION FITTING Ø1/4" SS
IX6S - COMPRESSION FITTING Ø3/8" SS
IX8S - COMPRESSION FITTING Ø1/2" SS

TECHNICAL SPECIFICATION
MATERIAL: BRASS CuZn39Pb3 CHROME-PLATED
SEAL: PCTFE

ALL PORTS WITH THREAD NPT1/4"F

INLET PRESSURE:
BASIC VALVE MAX.300BAR
STAINLESS STEEL FITTINGS MAX.300BAR
BRASS FITTINGS MAX.130BAR

GAS TYPE:
DEFINED BY PRODUCT LINE AND TYPE
(CHECK APPROVED GAS TYPE IN DATASHEET)

PUR LINE:
NON-CORROSIVE GASES
NON-TOXIC GASES

EXAMPLE: VPLDSMARGXN14F0000N14F0000

Polotovár Raw material	Rozměr polotovaru Dim. of raw material	Povrchová úprava Surface finish	Hmotnost Weight
Materiál Material	Materiál Material	Starý výkres Old drawing	0,33 kg
Komentář Notice	Kritický rozměr značen Critical dimension marked	Sheet / Number of sheets	1 / 2
Datum vypracování Creation date	Opracování / Machining	VALVE PUR LOW FLOW VLV PUR 20QM DS M AR	
Vypracoval Created	Netolerovány / Dim. without tol.		
Kontroloval Inspected	ISO 2768 m,K		
Schválil Approved	Měřítko / Scale		
Klasifikace Item Class	1:1		